


Rigid LED Strip Lighting

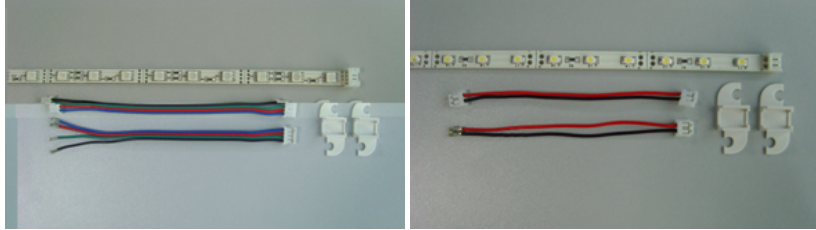

Model Number	Color	Length (m)	LED Q'ty	LED Type	Light Output (mcd)	Light Output (lumen)	Beam Angle (degrees)	Voltage (V DC)	Current (Amps)	Max. Power Consumption (W)	Continuous Connection (m)
ML-SMD-R	Red	0.5	30	Top SMD LED 3528 (2012)	30x600	45	120	12	0.34-0.4	4.8	15
ML-SMD-Y	Yellow	0.5	30		30x600	45	120	12	0.34-0.4	4.8	15
ML-SMD-B	Blue	0.5	30		30x250	30	120	12	0.34-0.4	4.8	15
ML-SMD-G	Green	0.5	30		30x650	50	120	12	0.34-0.4	4.8	15
ML-SMD-W	White	0.5	30		30x1200	60	120	12	0.34-0.4	4.8	15
ML-SMD-WW	Warm White	0.5	30		30x850	45	120	12	0.34-0.4	4.8	15
ML-SMD-RGB	RGB	0.6	30	Top SMD LED 5060	30x1500	135	120	12	0.51-0.6	7.2	15

Application

- Cove lighting
- Architectural lights for corridors, windows, archways
 - Backlight or edge lighting for signage
 - DIY lights for home use
 - Decorative lights for events, shows, exhibitions
- Ideal replacement of incandescent and fluorescent light

Features

- Can be cut every 3 Led's along the mark on PCB
- Mounting accessories available in 3M tape and bracket
 - Low power consumption; no heat
 - Compact size to suit narrow space installation
 - Well-protected package for shipment
 - Easy connection