

Rigid LED Strip Lighting




Model Number	Color	Length (m)	LED Q'ty	LED Type	Light Output (mcd)	Light Output (lumen)	Beam Angle (degrees)	Voltage (V DC)	Current (Amps)	Max. Power Consumption (W)	Continuous Connection (m)
ML-WPP30-R	Red	0.5	30	3528 SMD LED	30x850	120	120	12V DC	.3	3.6	5
ML-WPP30-B	Blue	0.5	30		30x230	50	120	12V DC	.2	2.4	7.5
ML-WPP30-W	White	0.5	30		30x2500	230	120	12V DC	.8	4.8	5
ML-WPP30-WW	Warm White	0.5	30	3528 SMD LED	30x2000	190	120	12V DC	.8	4.8	5
ML-WPP60-R	Red	1.0	60	3528 SMD LED	60x850	240	120	12V DC	.6	7.2	5
ML-WPP60-B	Blue	1.0	60		60x230	100	120	12V DC	.4	4.8	7.5
ML-WPP60-W	White	1.0	60		60x2500	460	120	12V DC	.8	9.6	5
ML-WPP60-WW	Warm White	1.0	60	3528 SMD LED	60x2000	380	120	12V DC	.8	9.6	5
ML-WPP60-RGB	RGB	1.0	60							14.4	


Applications

- Display cases
- Cabinet lighting
- Architectural lights for corridors, windows, archways
- Backlight or edge lighting for signage
- DIY lights for home use
- Decorative lights for events, shows, exhibitions
- Decorative and functional lights for caravans, motor homes and vehicles
- Ideal replacement of incandescent and fluorescent light
- Lights for spas, pools and waterfalls

Dimensions

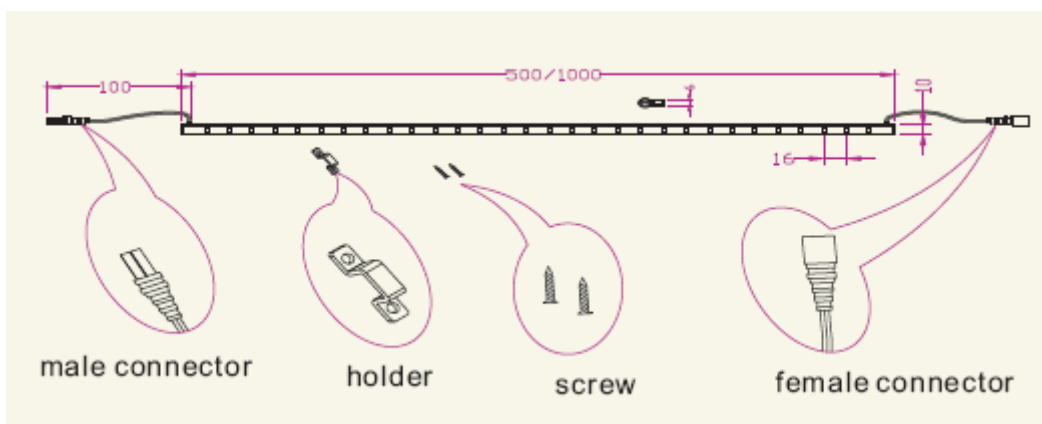

Linking operation

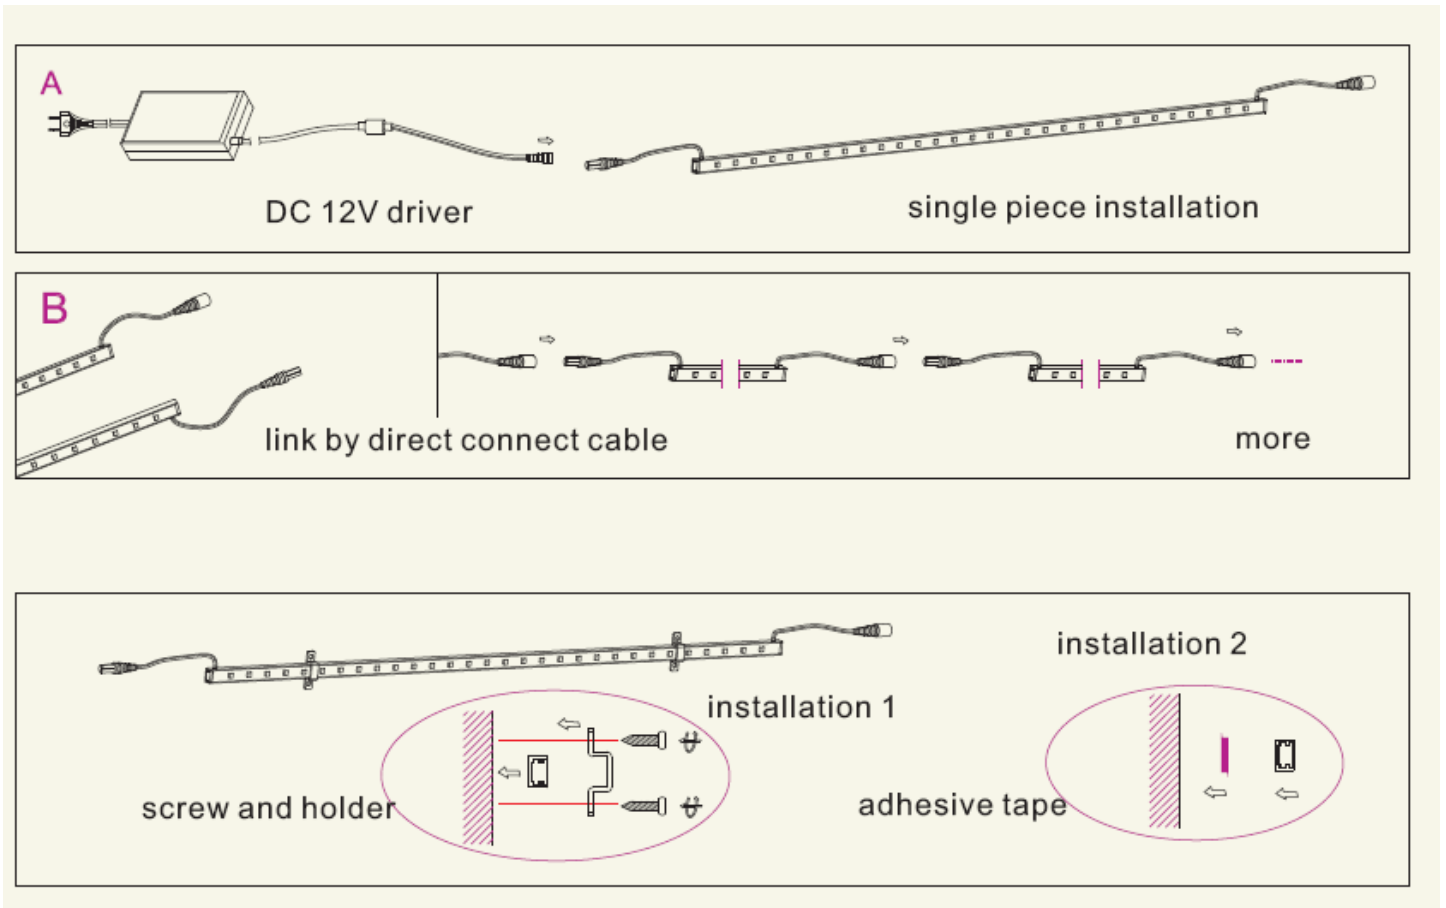

Please visit our website for full warranty/disclaimer information or contact your supplier for further information